





The best stainless-steel self drilling screws

RB 75° ~ 90°

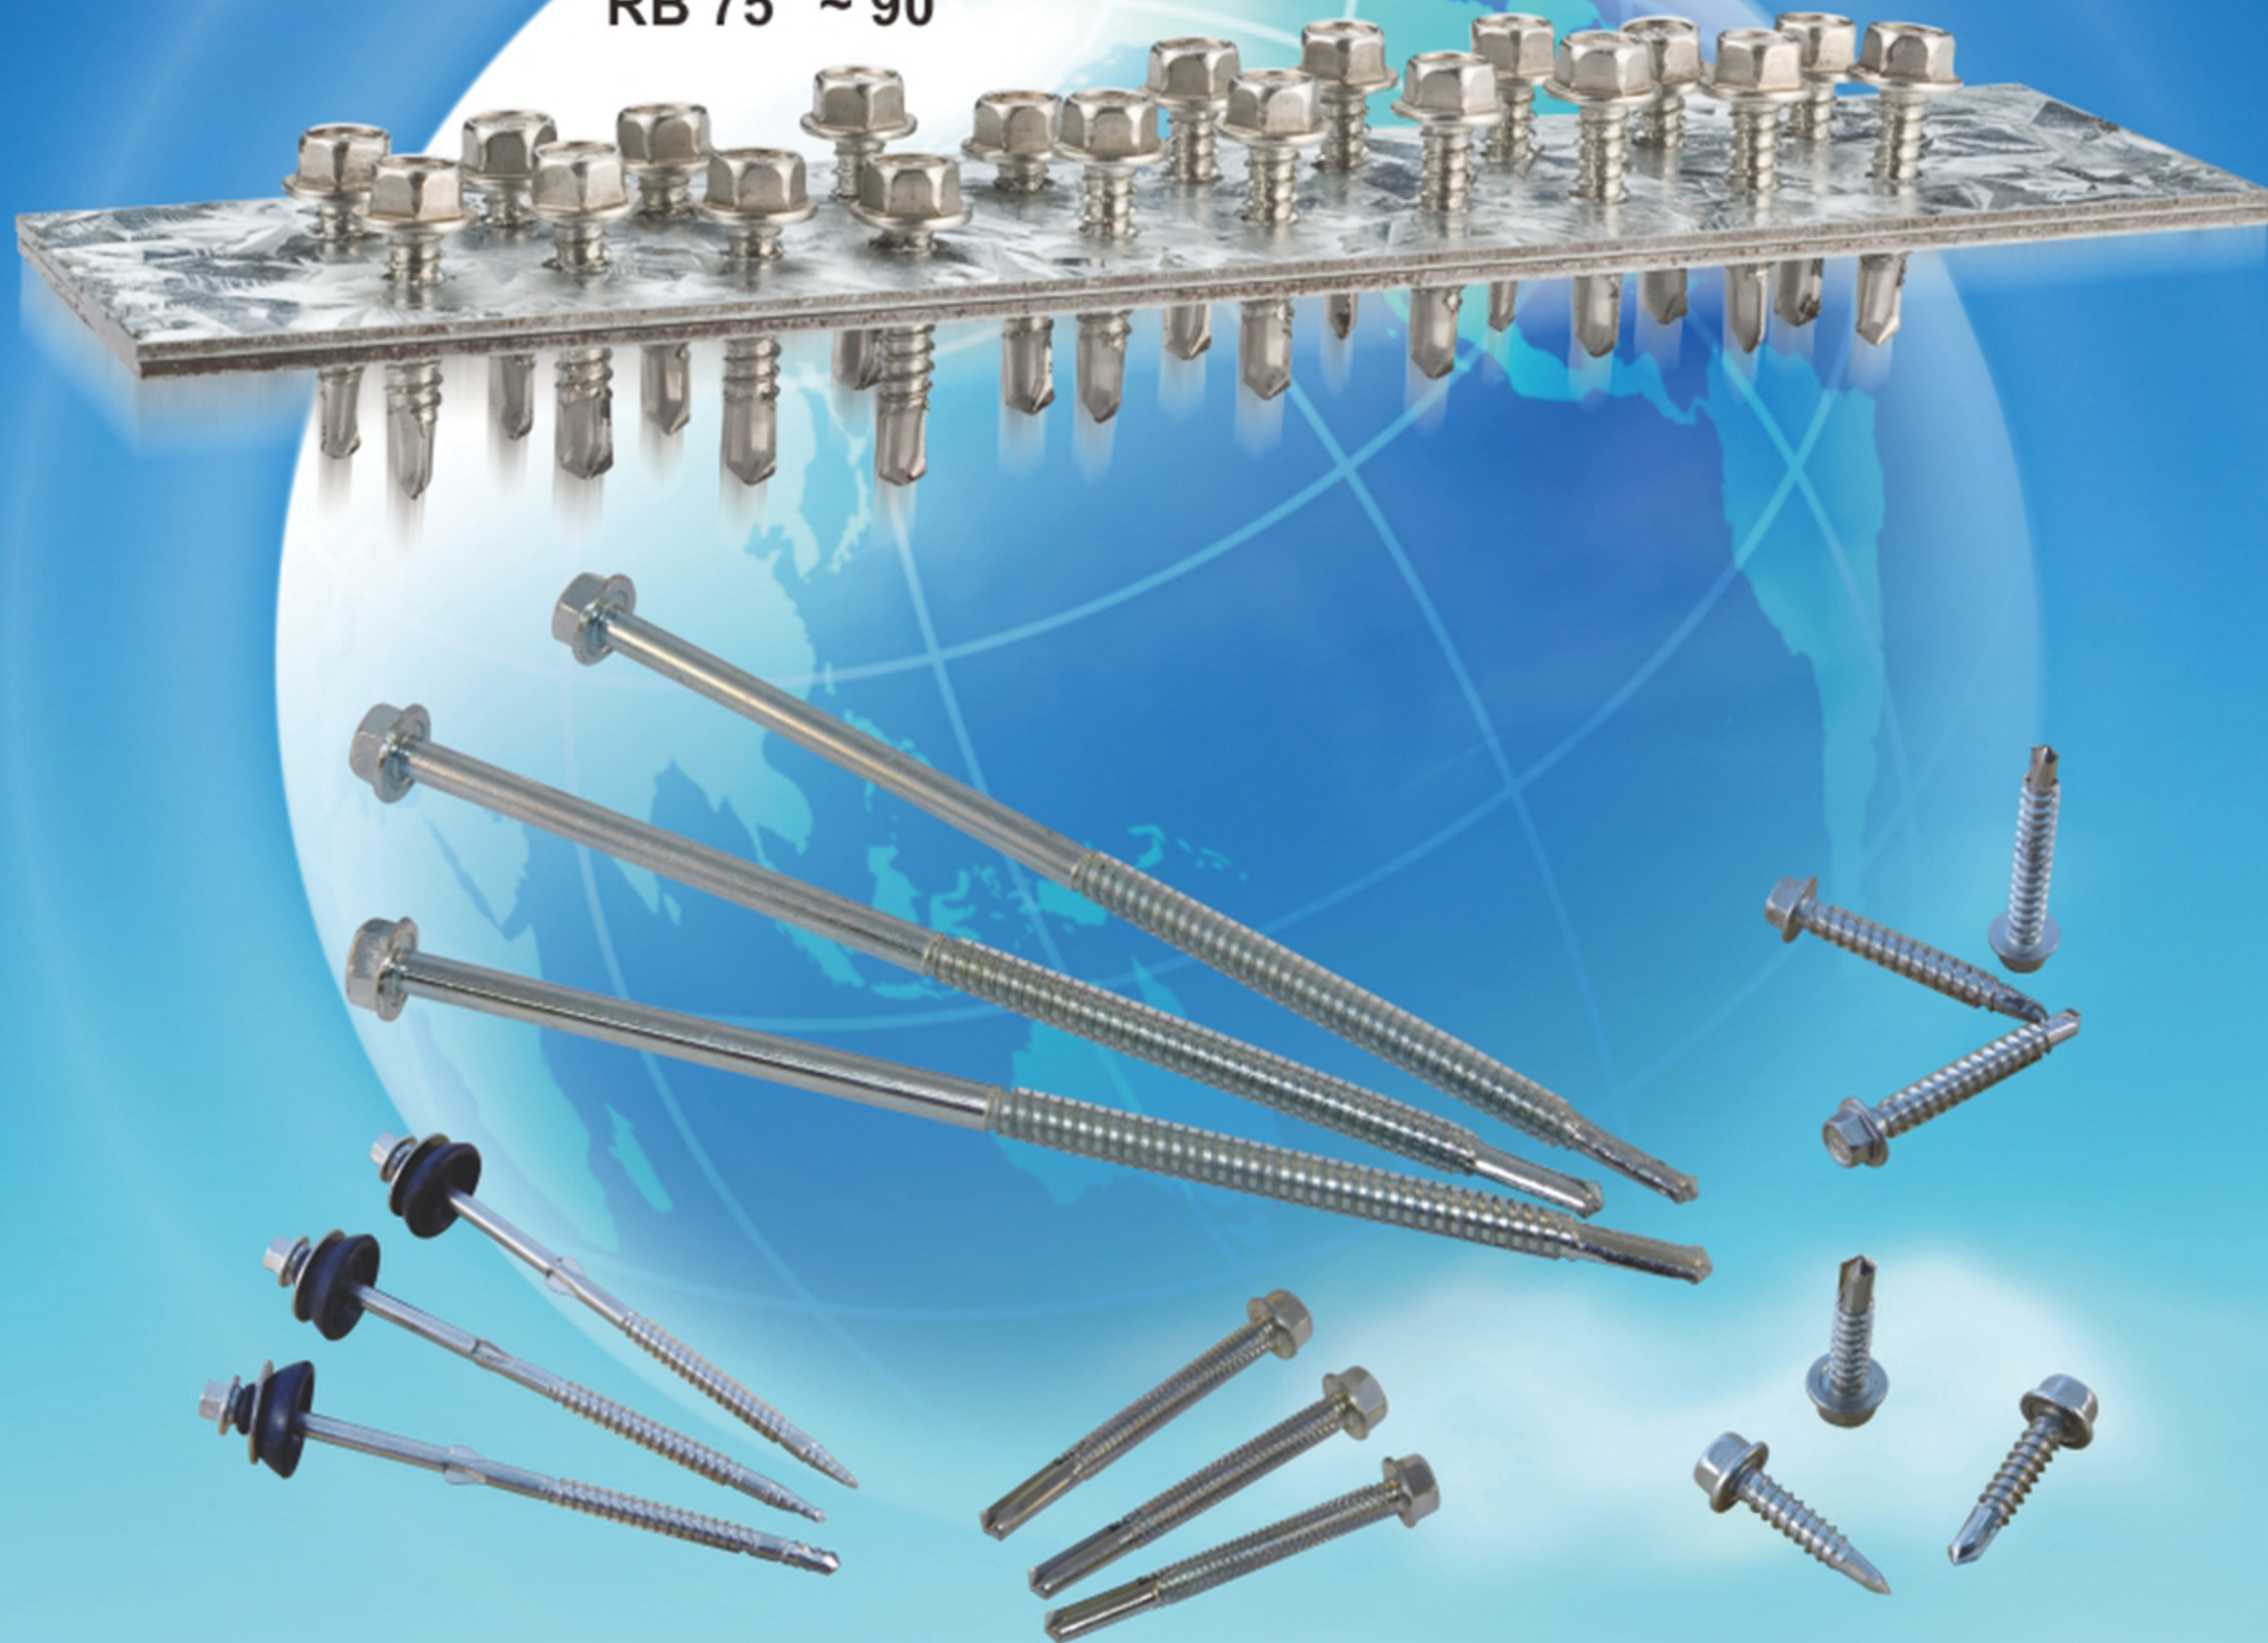

Comparison Chart

	Our model	Traditional model	Composite model
Hardness	500 hv	300 hv	350 hv
Torque	150kg.cm.	60kg.cm.	80kg.cm.
Capability (on RB75 steel panel)	Handles 1~4mm thickness	Handles 0.5~1mm thickness	Handles 2~12mm thickness
Corrosion resistance	Non-magnetic; excellent corrosion resistance	Non-magnetic	Non-magnetic easily rusts

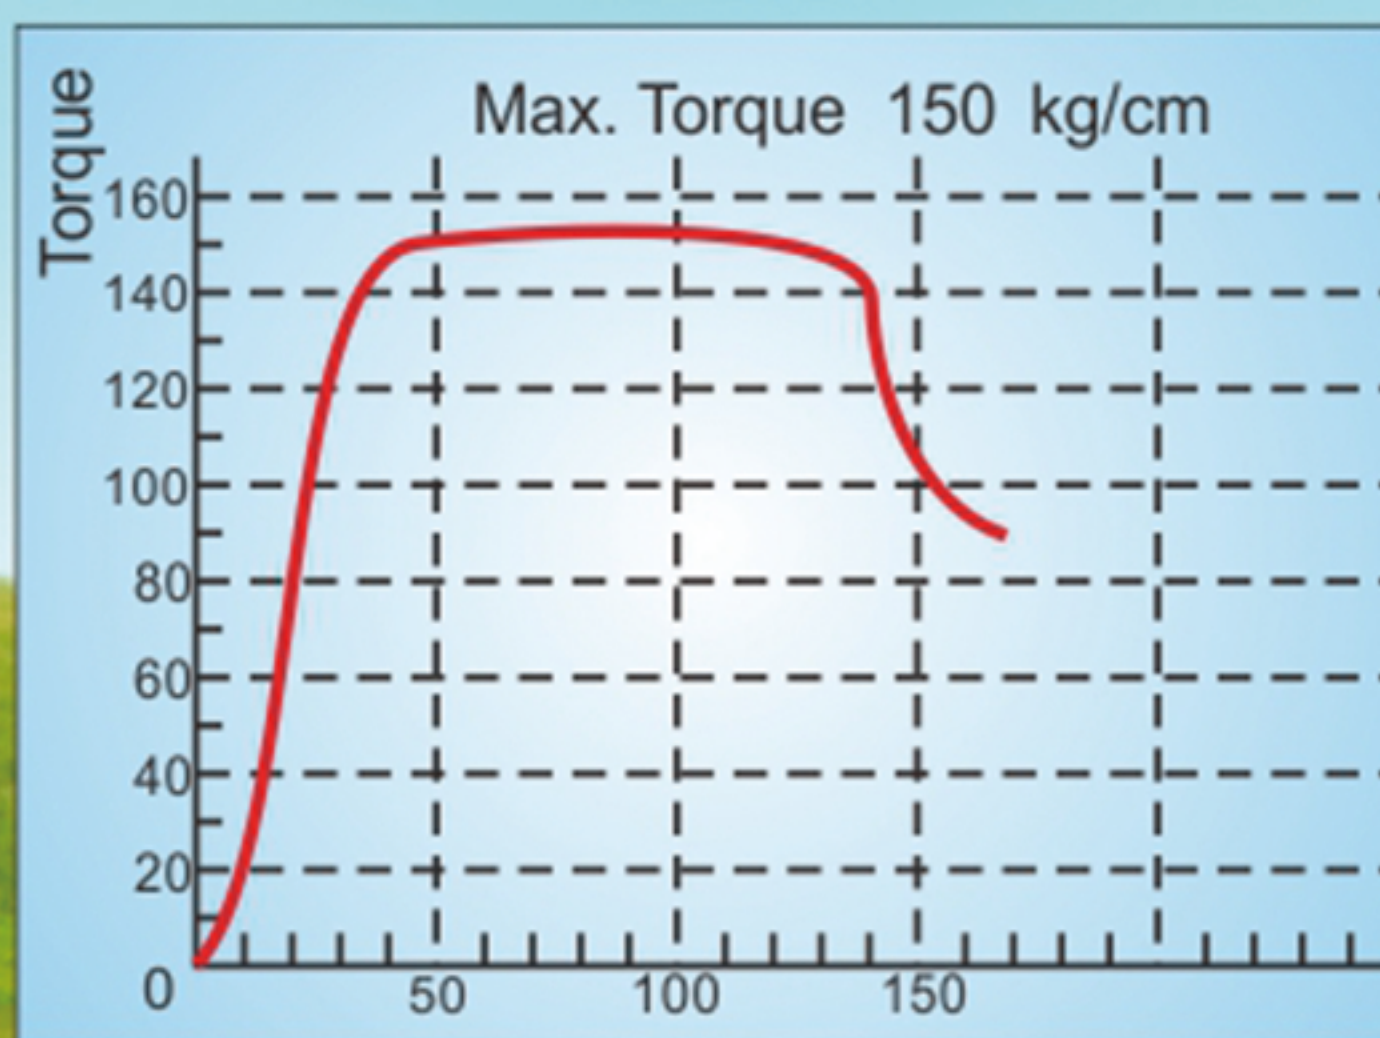

CHIN CHING INDUSTRIAL CO., LTD.

No. 151, Lane 1, Wenchang Rd., Sec. 3, Chengkung Borough, Dadu Dist., Taichung City, Taiwan 432

TEL: 886-4-2698-1986 FAX: 886-4-2699-8199

E-mail: jinjing.a2@msa.hinet.net <http://www.jinjeng.com>